

KEN HOLDING CO., LTD.

NO.5 XINRONG ROAD, XINQIAO TOWN SONGJIANG DISTRICT, SHANGHAI 201612, CHINA

office@china-ken.com http://www.ken-tools.com

@202307

KEN PRODUCT CATALOG KEN HOLDING CO.,LTD.

COMPANY PROFILE

20 YEARS PROFESSIONAL ELECTRIC POWER TOOLS ENTERPRISE

Ken Holding Co., Ltd., founded in 2000, and headquartered in Shanghai, is focusing on the R&D, Manufacturing and Sales of professional electric power tools. For more than 20 years, KEN has given full play to the advantages of technology and human resources in Shanghai, integrated high-quality R&D technology in the global power tool industry, won many honors and titles such as "China Famous Brand", "High-Tech Enterprise", "Shanghai Famous Trademark", and was successfully listed in 2010 (Stock code: 300126), becoming an extremely influential well-known enterprise in China's electric power tool industry.

CRAFTSMANSHIP AND QUALITY FIRST

KEN always adheres to the brand concept of "craftsmanship and quality first", guarantees the quality of products with strict production and quality control standards, and committed to providing users with high-quality power tools. Relying on outstanding quality, KEN has not only won unanimous recognition and industry honors in the Chinese market, but also actively deploys the global market. KEN products are exported to more than 60 countries and regions overseas. The brand reputation of domestic products has also won the respect and cooperation of many international power tool companies.

EMPOWER USERS TO CREATE VALUE

KEN pursues the corporate philosophy of "sharing the joy of work", continuously provides users with high-efficiency power tools and wholeheartedly empowers users to achieve a more efficient and easier work experience and create higher work value.

MAJOR AWARDS AND HONORS

- ◆ National High-Tech Enterprise
- ◆ National Intellectual Property Advantage Demonstration Enterprise
- ◆ China Excellent Private Technology Enterprise
- ◆ Shanghai Famous Trademark Brand
- ◆ Shanghai Science and Technology **Enterprise Innovation Award**

ICON INDEX





Electronical

































































































CONTENTS

New Products Corded Corded Corded **Angle Grinder** Woodworking **Drilling** Machine Machine 30~33 01~02 43~45 15~21 12V Lithium-ion **Others Cordless Series** 03~07 22~24 34~37 46 20V Lithium-ion Corded **Corded Demolition Cordless Series Cutting Machine** & Rotary Hammer

38~42

25~29

08~14



Brushless Grooving Machine **BA4190**

Brushless Angle Grinder **BA9010A**

Angle Grinder

6320ER / 6320JER 6633ER 9125C

Drill

Lithium-ion **Cordless Drill**

BL7312 / BL7312D

Lithium-ion

BL7520

Lithium-ion **Cordless Wrench Cordless Circular** Saw


Rotary Hammer

BL5145

2326 / 2326G

12V Li-ion Cordless Series



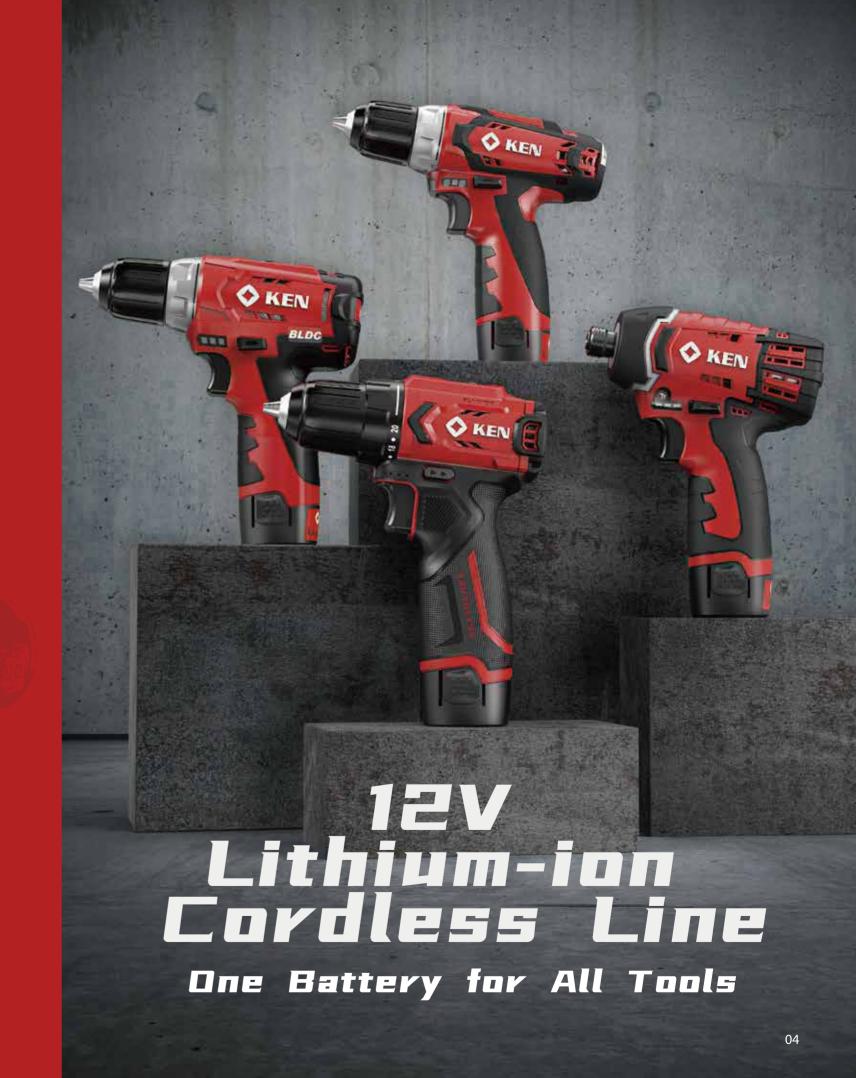




	12V Lithium	-ion Battery	Charging Time Reference		
Ī	Battery Model	Capacity	Charger Model: DC12LC-1.5A	Charger Model: DC12LC/3A	
Ī	L1220C	2.0Ah	≈80min.	≈40min.	

	12V CORDLESS DRILL TABLE										
Model	Battery Included	Charging Time	Brushless Motor	Max Torque	Max Chuck	Variable Speed	2 Speed	Forward Reverse	Torque Setting	Package	Application
BL6212CB	2	80min.		30N·m	10mm	•	•	•	15+1	Carrying Case	Assembly, Repairs Buildings
BL6212CB-Z	-	-		30N·m	10mm	•	•	•	15+1	Color Box	Assembly, Repairs Buildings
BL7212-20C	2	80min.	•	30N·m	10mm	•	•	•	15+1	Color Box	Assembly, Repairs Buildings
BL7212-Z	-	-	•	30N·m	10mm	•	•	•	15+1	Color Box	Assembly, Repairs Buildings
BL7312-2	2	80min.	•	45N·m	10mm	•	•	•	20+1	Color Box	Assembly, Repairs Buildings
BL7312	-	-	•	45N·m	10mm	•	•	•	20+1	Color Box	Assembly, Repairs Buildings
BL7312D-2	2	80min.	•	45N·m	10mm	•	•	•	20+2	Carry Case	Assembly, Repairs Buildings
BL7312D	-	-	•	45N·m	10mm	•	•	•	20+2	Color Box	Assembly, Repairs Buildings

The above data are from KEN Laboratory, the actual situation will be different according to the working condition and test environment, the data is for reference only

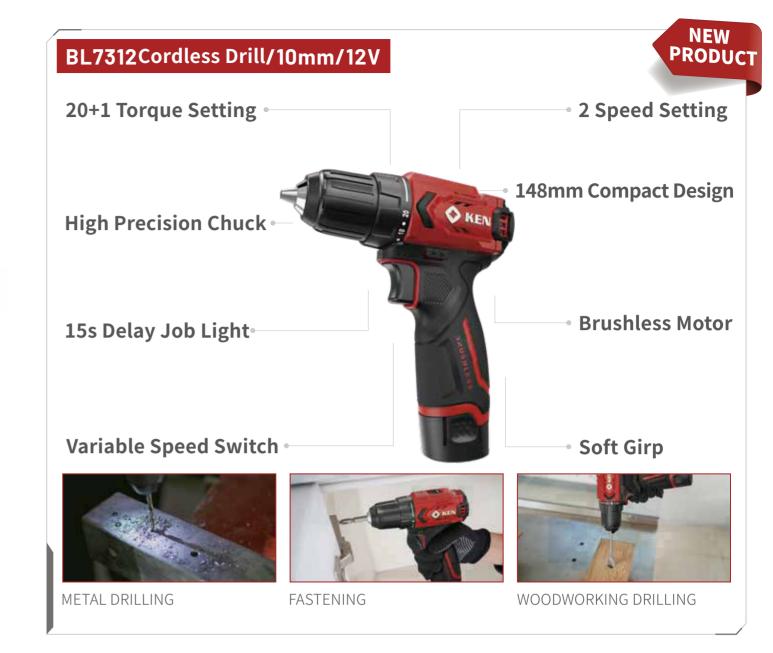









BL7212-20C (2 Batteries): Battery*2, Charger, Tool Bag, Drill Bits

BL7212-Z (Tool Only): Accessories Sold Separately







20V Li-ion Cordless Series





20V Lithium	-ion Battery	Charging Time Reference		
Battery Model	Capacity	Charger Model: DC20LC-2A	Charger Model:DC20LC/4A	
L2020	2.0Ah	≈60min.	≈30min.	
L2025	2.5Ah	≈75min.	≈38min.	
L2040	4.0Ah	≈120min.	≈60min.	
L2050	5.0Ah	≈150min.	≈75min.	
L2060	6.0Ah	≈180min.	≈90min.	
L2080	8.0Ah	≈240min.	≈120min.	

All New 21700 Lithium-ion Battery Line

Waterproof Design

High Capacity Cell

- The deflector directs water from the PCB to the deflector hole

Optimized Electrode Design

Effectively reduce resistance, improve electrical connection stability and reduce heat generation during working

Upgraded Battery Protection Scheme

Large area low resistance battery connection piece to meet high-power use and effectively help the battery heat dissipation

ICS Intelligent Control system

Professional communication protocol technology design, to achieve communication and exchange data with the host, charger, to prevent battery overcharge, overdischarge, overload, overheating, all-round safety protection, greatly improve the battery life

PCB Protective Coating

Effectively prevent water condensation and damage to the print circuit board

Battery Cell

High capacity 21700 cell


4 LED light fuel gauge

ShockAbsorber Separator

Absorb the shock caused by external impact, and protect the stability of the battery pack structure





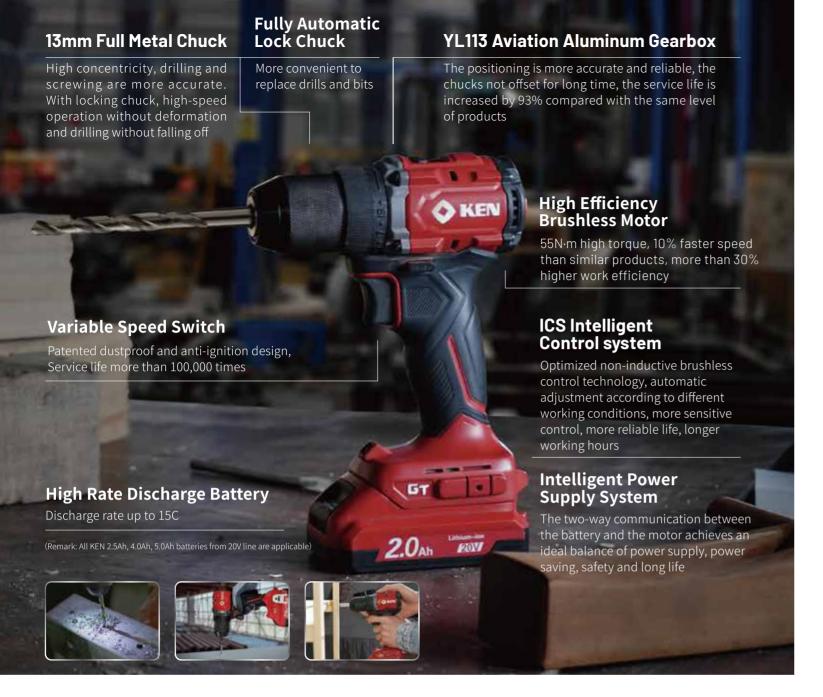













Corded Angle Grinder






	CORDED ANGLE GRINDER TABLE									
Model	Power	No Load Speed	Wheel Diameter	Motor	Switch Type	Grip Type	Power Failure Protection	Self-Stop Carbon Brush	External Carbon Brush	Application
9913B	670W	11000	100mm		Toggle Switch				•	Home Improvement
9710	710W	11000	100mm		Toggle Switch					Home Improvement
91678	750W	11000	100mm		Toggle Switch			•		Stone Grinding Carving
9167G	860W	11000	100mm		Side Switch			•		Metal Grinding Cutting
9167SA	860W	11000	100mm		Toggle Switch			•		Stone Grinding Cutting
9810	950W	12000	100mm	Hurricane Motor	Side Switch			•		Metal Grinding Rust Removal
9810A	950W	12000	100mm	Hurricane Motor	Toggle Switch			•		Metal Grinding Rust Removal
9910	1200W	13000	100mm	Hurricane Motor	Side Switch			•		Metal Grinding Cutting
9910A	1200W	13000	100mm	Hurricane Motor	Toggle Switch			•		Metal Grinding Cutting
BA9010A	1100W	11000	100mm	Brushless Motor	Toggle Switch		•			Stone Grinding Carving
9115	860W	11000	115mm		Side Switch			•		Metal Grinding Cutting
9125	860W	10000	125mm		Side Switch			•		Metal Grinding Cutting
9125C	1200W	11000	125mm		Side Switch			•		Metal Grinding Cutting
9925D	1240W	7500	125mm		Toggle Switch	Rear Grip			•	Metal Grinding Cutting
9525B	1500W	10000	125mm		Toggle Switch	Rear Grip		•	•	Wall Slotting
9925E	1100W	2800-7500	125mm		Side Switch					Metal Grinding Cutting
9550B	1500W	10000	150mm		Toggle Switch	Rear Grip		•	•	Wall Slotting
9550K	1800W	10000	150mm		Toggle Switch	Rear Grip		•	•	Wall Slotting
9180S	2450W	8500	180mm		Toggle Switch	Rear Grip		•	•	Metal Grinding Cutting
9123S	2450W	6500	230mm		Toggle Switch	Rear Grip		•	•	Metal Grinding Cutting

The above data are from KEN Laboratory, the actual situation will be different according to the working condition and test environment, the data is for reference only



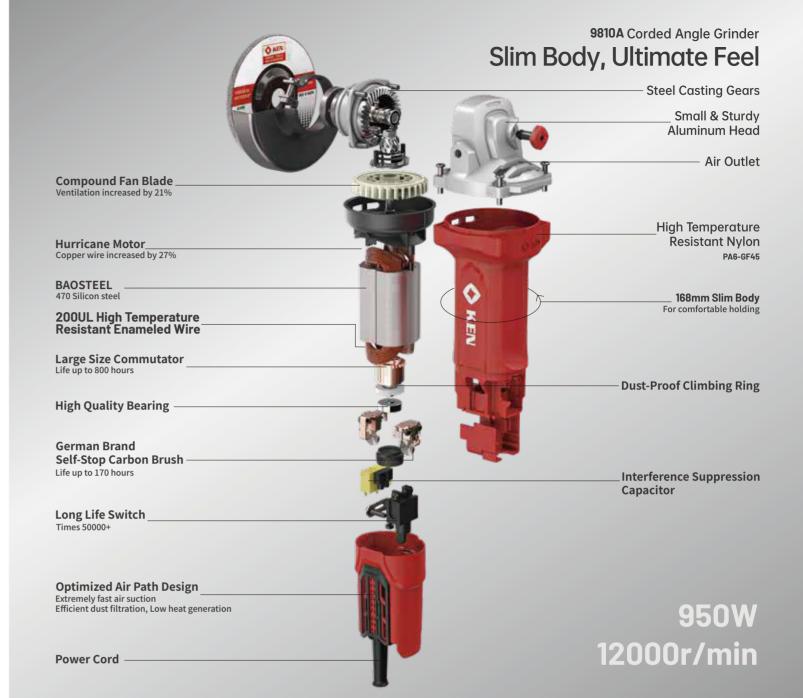








































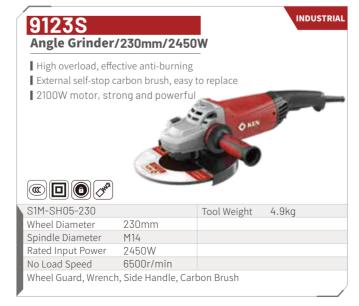

Corded Grinder




























Corded Cutting Machine






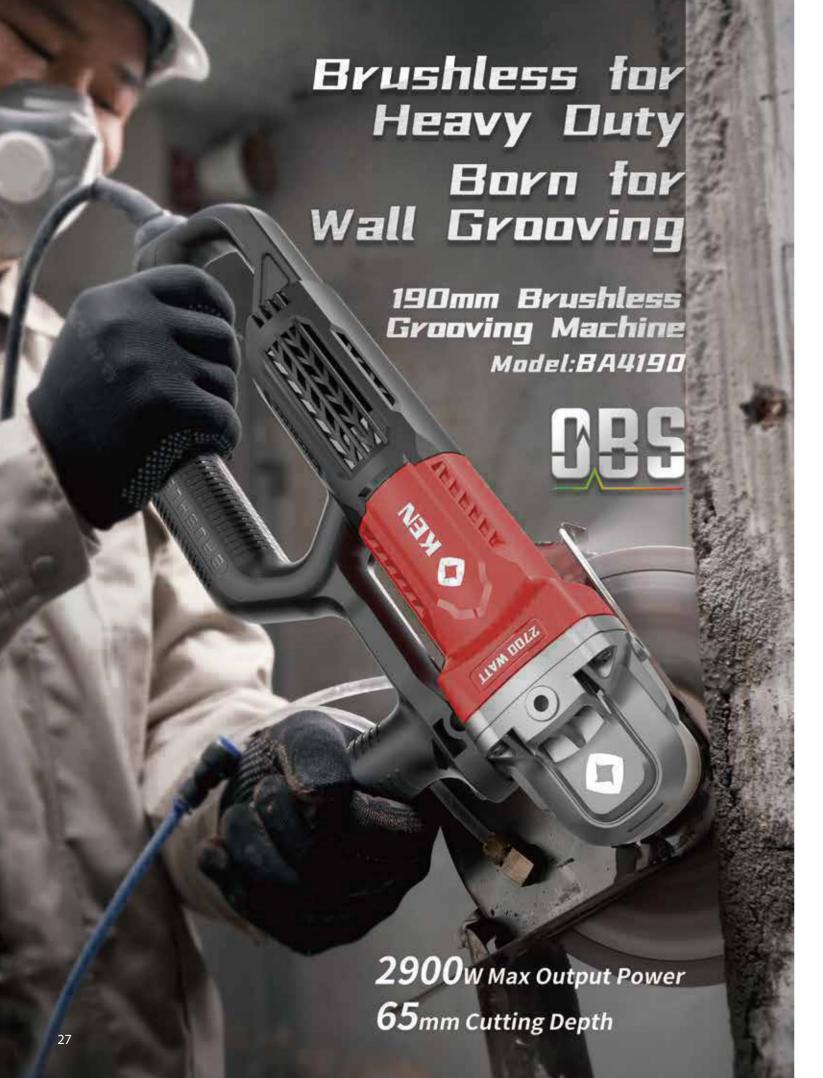







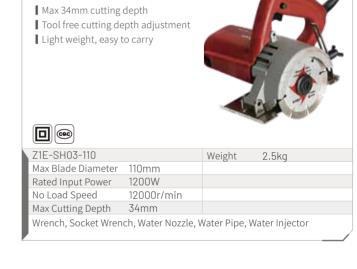

Masonry Saw/110mm/1200W







Masonry Saw/110mm/1250W I Max 34mm cutting depth I Tool free cutting depth adjustment

Z1E-SH10-110		Max Cutting Depth	34mm
Blade Diameter	110mm	Weight	2.9kg
Rated Input Power	1250W		
No Load Speed	13000r/min		
Wrench, Socket Wren	ch		

4510B Masonry Saw/110mm/1500W Powerful 1500W motor, high efficiency Soft grip for easier handling Dust guard design, longer life Compactible with max 125mm cutting disc Tool free cutting depth adjustment Enlarged stainless steel base plate for ▮ Plate adjustable from 45° to 90° for <u>differen</u>t applications Z1E-SH08-110 Weight 3.2ka Blade Diameter Rated Input Power 1500W 13000r/min Max Cutting Depth 90°/34mm 45°/21mm

Carbon brush, Injector, Nozzle, Water pipe, Inner hexagon wrench,

Outer hexagon wrench



Wrench, Auxiliary Handle, Water Nozzle, Water Pipe, Water Injector

Max Cutting Depth 60mm



Corded Woodworking Machine





















S1B-SH01-114X234		Weight	10000r/min
Base Plate Size	114x234mm	No Load Speed	2.6kg
Sanding Sheet Size	114x280mm		
Oscillating Distance	2.4mm		
Rated Input Power	550W		
Sanding Sheet			

Trim Router/550W

- **▮** Dustproof design
- 550W motor
- Soft grip, comfortable operation



L]	(Ce(
M1	IR-	.5	Н	0	4-
_			~:		

1	M1R-SH04-6		
1	Collet Size	6.35mm(1/4")	
1	Rated Input Power	550W	
ı	No Load Speed	31000r/min	
ı	Weight	1.45kg	
1	Straight Guide, Gauge	Guide, Wrench, G	uide Bar. Trim Base

3706N

Trim Router/580W

- Dustproof design
- 580W motor
- Aluminum housing





M1R-SH05-6		
Collet Size	6.35mm(1/4")	
Rated Input Power	580W	
No Load Speed	33000r/min	
Weight	1.5kg	
Straight Guide Gauge	Guide Wrench G	uide Bar Trim Base



Router/1850W

- ▮ 1850WHigh power motor
- Quick depth adjustment system
- Unique air path, fast heat dissipation





	M1R-SH01-12				
	Collet Size	12.7mm(1/2")			
	Rated Input Power	1850W			
	No Load Speed	23000r/min			
	Weight	6.5kg			
ı	Gauge Guide, Wrench, Dust Cover, Trim Base, Straight Guide Transparent Guard, Collet, Positioning Stand				

1982

Hand Planner/710W

- Safety shelving floor design
- Switch left and right self-locking function"
- V shape groove chamfered bottom plate





M1B-SH03-82X2		Weight	2.6kg
Max cutting depth	2mm		
Max cutting width	82mm		
Rated Input Power	710W		
No Load Speed	16000r/min		
Guide, Sharpening Tool Holder, Base Plate, Wrench			

1260E

Jig Saw/550W

- 60mm cutting dept
- Saw blade four setting adjustable
- Adjustable speed







	1110-31102-00		
	Maximum Cutting Capacity	Wood 60mm、Steel 10mm	
	Rated Input Power	550W	
	No Load Speed	500-3000r/min	
	Weight	2.3kg	
Saw Blade Hex Bar Wrench Transparent Guard Carrying Case			

Screw, Crack Prevention Device

Corded Drill





	CORDED DRILL										
Model									Application		
	Input Power	Chuck	Туре	Speed	Steel	Aluminum	Wood	Reverse	Speed		
6410ER	350W	10mm	Steel Chuck	0-3000	10mm	13mm	20mm	•	•		Woodworking Home Improvement
6410JER	350W	10mm	Keyless chuck	0-3000	10mm	13mm	20mm	•	•		Woodworking Home Improvement
6010ER	400W	10mm	Steel Chuck	0-1500	10mm	13mm	20mm	•	•		Woodworking Color Steel Tile Installation
6630ER	450W	10mm	Steel Chuck	0-3500	10mm	13mm	25mm	•	•		Woodworking Home Improvement
6630JER	450W	10mm	Keyless chuck	0-3500	10mm	13mm	25mm	•	•		Woodworking Home Improvement
6520ER	580W	10mm	Steel Chuck	0-2900	10mm	13mm	25mm	•	•		Woodworking Metal Panel Beating
6520JER	580W	10mm	Keyless chuck	0-2900	10mm	13mm	25mm	•	•		Woodworking Metal Panel Beating
6320ER	710W	10mm	Steel Chuck	0-3200	10mm	20mm	30mm	•	•		Woodworking Home Improvement Equipment Assembly
6320JER	710W	10mm	Keyless chuck	0-3200	10mm	20mm	30mm	•	•		Woodworking Home Improvement Equipment Assembly
6523ER	580W	13mm	Steel Chuck	0-2900	13mm	13mm	25mm	•	•		Metal Panel Beating Equipment Assembly
6633ER	710W	13mm	Steel Chuck	0-2600	13mm	20mm	30mm	•	•		Metal Panel Beating Equipment Assembly
6823E	850W	13mm	Steel Chuck	0-850	13mm	20mm	36mm		•		Formworker Painter
6816N	1200W	16mm	Steel Chuck	950	16mm	20mm	36mm				Formworker, Painter Concrete working
6913ERD	580W	13mm	Steel Chuck	0-2500	Brick: 13mm	Metal: 13mm	25mm	•	•	•	Woodworking Home Improvement

The above data are from KEN Laboratory, the actual situation will be different according to the working condition and test environment, the data is for reference only































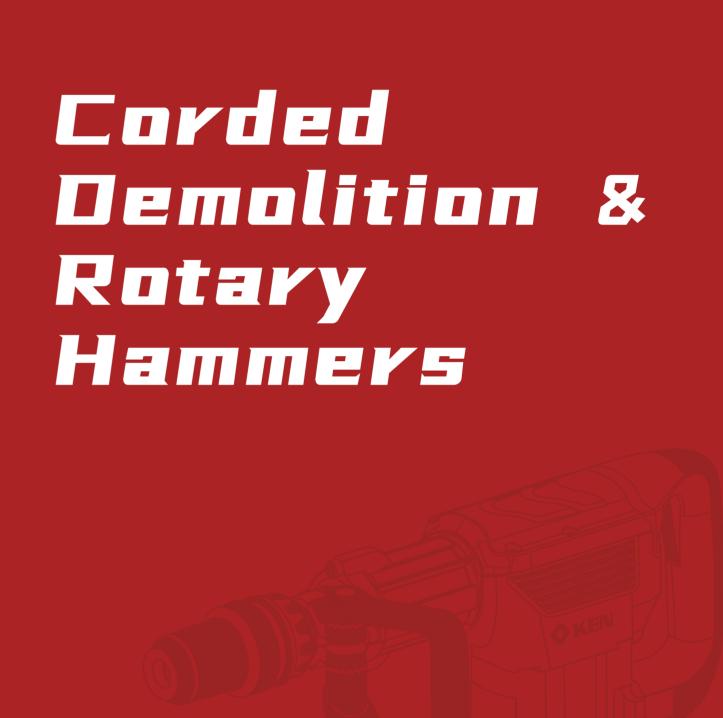

	CORDED ROTARY HAMMER TABLE													
Model	Rated	No	IPM		Weight		Best Drill	Function				Application		
	Input Power	Load Speed		Energy		Drill Diameter	Diameter	Clutch	Variable Speed		Drill Function	Forward Reverse	Speed Adjust -ment	
2520E	500W	850	3900	2.3J	2.3Kg	20mm	6-12mm	•	•		•		•	Decoration and Installation
2526E	810W	1200	4000	3 J	2.6Kg	26mm	6-18mm	•	•		•		•	Decoration and Installation
2526GER	810W	1200	4000	3J	2.6Kg	26mm	6-18mm	•	•	•	•		•	Decoration and Installation
2826GB	750W	450	3000	3.5J	5.2Kg	26mm	8-18mm			•				Industrial Decoration Building
2832G	1200W	1000	4700	5J	5.2Kg	26mm	8-20mm	•		•				Grooving, Mold Blasting, Building
2326	1050W	1050	5400	5J	4.25Kg	26mm	8-14mm	•						Insulation Planting Bars Ceiling
2326G	1050W	1050	5400	5J	4.25Kg	26mm	8-14mm	•		•				Industrial Decoration Building

The above data are from KEN Laboratory, the actual situation will be different according to the working condition and test environment, the data is for reference only



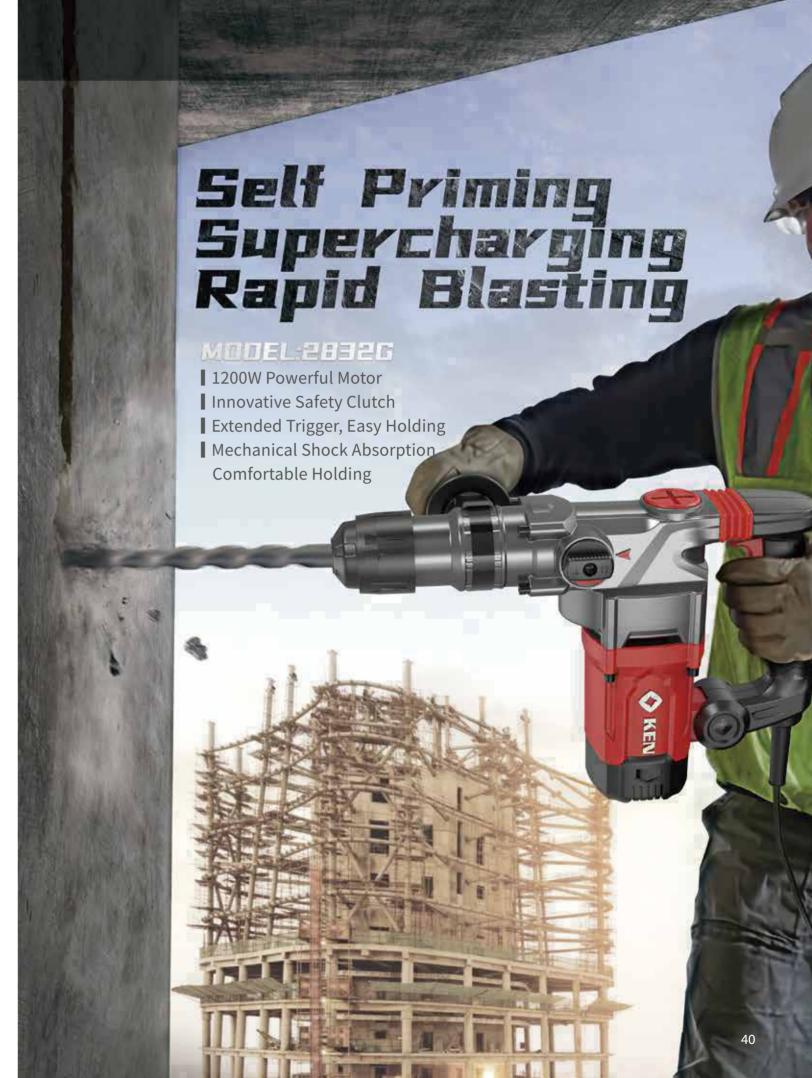





Max Drill Diameter Concrete 26mm

Steel 13mm

2.6kg

Wood 30mm

2526E

Safe clutch

No Load Speed

Z1C -SH06 -26

Impact Energy

Rotary Hammer Drill/810W

■ Two application model hammer drill

■ Light weight, high hammering force

SDS-plus quick change chuck

■ Electronic variable speed control

Impact Per Minute 0-4000ipm

0-1200r/min

Auxiliary Handle, Depth Gauge, Carrying Case

Rated Input Power 810W















Corded Dyilling Machine

6019N

Magnetic Drill/19mm/1180W

Strong magnetic adhesion, accurate positioning High overload resistance, effective anti-burning

Double insulation, safer operation



J1C-SH01-19		Base Size	205x105x72
Max Drilling	19mm	Input Power	1180W
Diamond Drill Bit	19mm(Twist Bit)	Output Power	840W
	60mm(Hollow Bit)	No Load Speed	350r/min
Voltage	220V	Weight	21kg (Machine)
Magnetic Adhesion	12000N	Standard Accs	Tapered Iron, Rope
Chuck Size	Mt2		

6023N

Magnetic Drill/23mm/1200W

Strong magnetic adhesion, accurate positioning High overload resistance, effective anti-burning

Double insulation, safer operation



J1C-SH01-23		Base Size	205x105x72
Max Drilling	23mm	Input Power	1200W
Diamond Drill Bit	23mm(Twist Bit)	Output Power	860W
	70mm(Hollow Bit)	No Load Speed	330r/min
Voltage	220V	Weight	21kg (Machine)
Magnetic Adhesion	13000N	Standard Accs	Tapered Iron, Rope
Chuck Size	Mt2		

6028N

Magnetic Drill/28mm/1480W

Strong magnetic adhesion, accurate positioning

High overload resistance, effective anti-burning

Double insulation, safer operation



J1C-SH01-28		Base Size	205x105x72
Max Drilling	28mm	Input Power	1480W
Diamond Bit	28mm(Twist Bit)	Output Power	1060W
	80mm(Hollow Bit)	No Load Speed	300r/min
Voltage	220V	Weight	22kg (Machine)
Magnetic Adhesion	13800N	Standard Accs	Tapered Iron, Rope
Chuck Size	Mt3		

6032N

Magnetic Drill/32mm/1700W

■ Strong magnetic adhesion, accurate positioning

■ High overload resistance, effective anti-burning

■ Double insulation, safer operation

Forward and reverse



J3C-SH01-32		Base Size	245x125x80
Max Drilling	32mm	Input Power	1700W
Diamond Bit	32mm(Twist Bit)	Output Power	1230W
	100mm(Hollow Bit)	No Load Speed	150r/min
Voltage	380V	Weight	44kg (Machine)
Magnetic Adhesion	15000N	Standard Accs	Tapered Iron, Rope
Chuck Size	Mt4		/

6038N

Magnetic Drill/38mm/1800W

 $\label{eq:continuous} \blacksquare \mbox{Strong magnetic adhesion, accurate positioning}$

■ High overload resistance, effective anti-burning

Double insulation, safer operation

Forward and reverse



J3C-SH01-38		Base Size	245x125x80
Max Drilling	38mm	Input Power	1800W
Diamond Bit	38mm(Twist Bit)	Output Power	1290W
	110mm(Hollow Bit)	No Load Speed	135r/min
Voltage	380V	Weight	44kg (Machine)
Magnetic Adhesion	15500N	Standard Accs	Tapered Iron, Rope
Chuck Size	Mt4		

6049N

Magnetic Drill/49mm/2000W

 ${\ensuremath{\rule[-0.45em]{0.5em}\rule{0.45em}{0.4em}}}$ Strong magnetic adhesion, accurate positioning

High overload resistance, effective anti-burning

Double insulation, safer operation

Forward and reverse



J3C-SH01-49		Base Size	220x180x120
Max Drilling	49mm	Input Power	2000W
Diamond Bit	49mm(Twist Bit)	Output Power	1450W
	120mm(Hollow Bit)	No Load Speed	120r/min
/oltage	380V	Weight	45kg (Machine)
Magnetic Adhesion	16500N	Standard Accs	Tapered Iron, Rope
Chuck Size	Mt4		/



Z1Z-SH02-110					
Max Chuck Diameter	110mm				
Input Power	1400W				
No Load Speed	0-2000r/min				
Weight	4.2kg				
Auxiliary Handle, Water Pipe, Adapter, Rear Shoulder, Screw, Water Nozzle					

6130

Dimond Drill/15-130mm/1450W

- ▮ 10% more power otput
- Safety clutch
- Relisble double isolation design
- Overload protection



Z1Z-SH01-1	130	Base Size	220x130x8
Max Drilling	15-130mm	Input Power	1450W
Voltage	220V-240V	Output Power	1050W
Weight	13kg/11kg	No Load Speed	980r/min
Collet	Spindle thread 1&1/4,M33	,M22or other thr	ead options

Water pipe connector,Wrench

6180

Dimond Drill/15-180mm/3500W

- ▮ 10% more power otput
- Safety clutch
- Relisble double isolation design
- Overload protection



	Z1Z-SH01-1	180	Base Size	220x170x10		
	Max Drilling	; 15-180mm	Input Power	3500W		
	Voltage	220V-240V	Output Power	2550W		
ı	Weight	23kg/20.5kg	No Load Speed	750r/min		
	Collet	Spindle thread 1&1/4,M33	,M22or other thr	ead options		
	Water pipe connector, Wrench					

6200N

Dimond Drill/15-200mm/3800W

- ▮ 10% more power otput
- Safety clutch
- Relisble double isolation design
- Overload protection



Z1Z-SH01-2	200	Base Size	220x170x10			
Max Drilling	15-200mm	Input Power	3800W			
Voltage	220V-240V	Output Power	2550W			
Weight	23kg/20.5kg	No Load Speed	700r/min			
Collet	Collet Spindle thread 1&1/4,M33,M22or other thread options					
Water nine connector Wrench						

11

6230N 6

- ▮ 10% more power otput
- Safety clutch
- Relisble double isolation design

Dimond Drill/15-230mm/3900W

Overload protection



Z1Z-SH01-	230	Base Size	220x170x10	
Max Drilling	g 15-230mm	Input Power	3900W	
Voltage	220V-240V	Output Power	2780W	
Weight	23kg/22kg	No Load Speed	600r/min	
Collet	Spindle thread 1&1/4,M33,M22or other thread options			
Water pipe connector,Wrench				

6250N

Dimond Drill/15-250mm/4000W

- 10% more power otput
- Safety clutch
- Relisble double isolation design
- Overload protection



Z1Z-SH01-250 Base Size 220x170x10

Max Drilling 15-250mm Input Power 4000W

Voltage 220V-240V Output Power 2850W

Weight 25kg/22kg No Load Speed 580r/min

Collet Spindle thread 1&1/4,M33,M22or other thread options

Water pipe connector,Wrench

Response to the state of the st

Others

